


RealityAdapter

Life can be smarter than you think!

©2018 Third Reality Inc. All rights reserved.

What's in the box

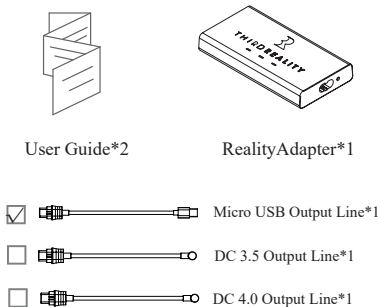


Features

1. Work with Amazon Alexa and Google Home Assistant
2. No extra hub required
3. Wi-Fi and ZigBee connectivity

Product configuration


● ZigBee LED/Power LED/Wi-Fi LED

Three LED indicators are provided. LED indicators will change accordingly with current RealityAdapter status.

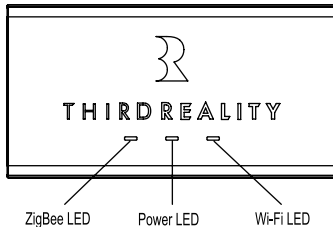

● Micro USB/DC (Power Input Port)

RealityAdapter comes with two kinds of power input port: Micro USB and DC, choose one based on the power line style of your existing Smart Speaker.

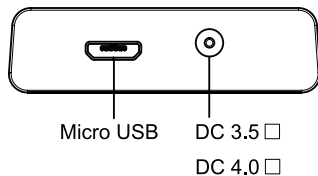

● Power Output Port

Plug power output line into Power Output Port and it will power the Smart Speaker.


● Reset

Reset Wi-Fi

To reset Wi-Fi, short press the Reset hole with a small needle and Wi-Fi LED will become fast blinking. Then you could enter the Wi-Fi password in the App to connect to the new Wi-Fi. Your account information will not be affected by this process.

Factory Reset

To restore factory setting, long press the Reset hole with a small needle until the Wi-Fi LED turns off. Then take out the small needle and wait a few seconds, the Wi-Fi LED will become fast blinking later.

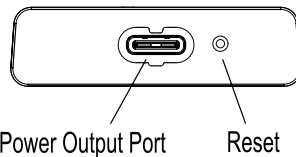

Attention: The Power Output Port is a proprietary port for the accessory cables. Do not plug USB Type-C connector into it.

Two ways to use RealityAdapter

A. In-line Mode


Control

To control ZigBee device through smart speaker



Installation

1. Plug the power adapter into RealityAdapter and then into a power outlet.
2. Plug the accessory Micro USB or DC output line into RealityAdapter and smart speaker according to the power connector type of the smart speaker.




Attention: The power input line A and power output line B have to be the same type: either Micro USBs or DCs.

B.Standalone Mode

Control

- 1.To control ZigBee device through ThirdReality App
- 2.To control ZigBee device through smart speaker like Echo Show or Google Home Max

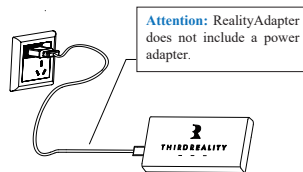

Installation

Plug the power adapter into RealityAdapter and then into a power outlet.

Instruction

- 1.Download Third Reality App on your smart phone or tablet, register or log in the App. Third Reality App is free and available on App Store and Google Play.




- 2.After RealityAdapter is powered on, Power LED and ZigBee LED will be lighting on and Wi-Fi LED will be fast blinking.

- 3.To add RealityAdapter to your app, please tap “+ New device” and follow the instructions on App. You can easily setup RealityAdapter using the App with Bluetooth mode. (Wi-Fi mode is also available)

Pairing – Power and ZigBee LEDs stay on; Wi-Fi LED is fast blinking

Pair completed – Power, ZigBee and Wi-Fi LEDs stay on.


Pair failed – Power and ZigBee LEDs stay on; Wi-Fi LED is slow blinking for 30 seconds then becomes fast blinking. (Please try to repair RealityAdapter with App again.)



- 4.To add device, please click “+ New device” and choose the device type. You will need to have a RealityAdapter added with App before this step, then follow the instructions to complete the setup. Once the pairing successfully, the device icon will be showed on the main screen.

Pairing – Power and Wi-Fi LEDs stay on; ZigBee LED is slow blinking

Normal – Power, ZigBee and Wi-Fi LEDs stay on

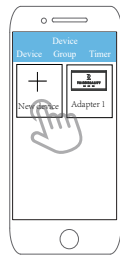

- 5.If you use RealityAdapter with Amazon Alexa or Google Home Assistant, please enable the ThirdReality Smart Home Skills at Amazon Alexa or link your Third Reality account to Google Home first; then enter your Third Reality account to get authorized access.

Status Indication

● Power LED

- ON - Power on
- OFF - Power off

● Wi-Fi LED

- Fast Blinking - Ready for connecting Wi-Fi
- Slow Blinking - Try to connect to Wi-Fi
- ON - Connected with Wi-Fi

● ZigBee LED

- Fast Blinking - System updating
- Slow Blinking - Pairing new device
- ON - Normal working condition

Troubleshooting

1.RealityAdapter’s icon is not displayed in the App

If RealityAdapter’s icon is not displayed in the App after the setup completed; which means pairing fails. Please reset RealityAdapter and pair it again.

2.RealityAdapter shows as offline in the App

Check Wi-Fi LED of RealityAdapter, if the light is slow blinking, move RealityAdapter near Wi-Fi router and restart RealityAdapter; if the light stays on, sign out and sign in the App.

Limited Warranty

For the limited warranty, please visit:
www.3reality.com/warranty

If you have any questions, please contact us at support@3reality.com or visit www.3reality.com/support

Want to speak to a human? Reach us at
[800-817-6870 \(6AM-10AM EST\)](tel:800-817-6870)
[800-341-9616 \(6PM-2AM EST\)](tel:800-341-9616)